
# OFFICINA DELLE IDEE

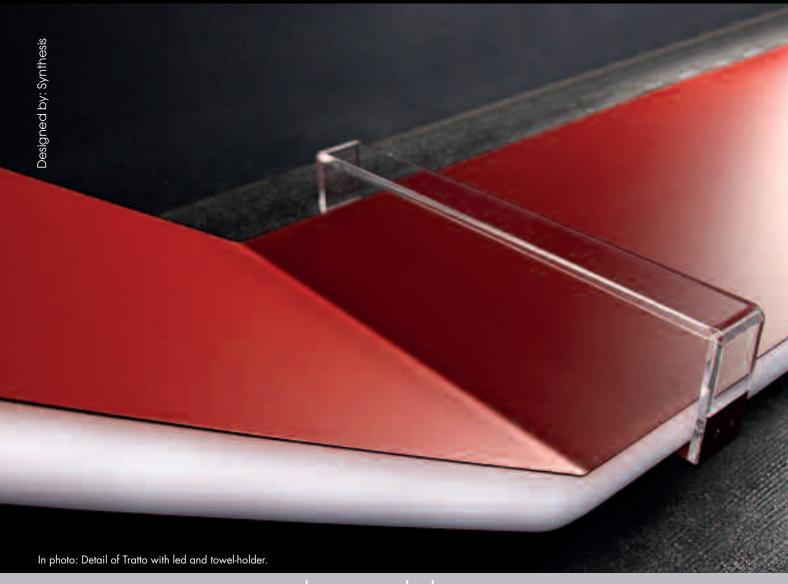


# tratto

A radiating panel designed to stand out thanks to its sinuous and coherent shape. **TRATTO**: makes its mark enhancing the ambient.

**TRATTO** innovates radiator design with its curved profiles highlighted by a luminous line of lateral LEDs (supplied standard in the model with light), providing space for a new towel-holder function.

Ideal for bathrooms, it can also be put to practical use in other rooms.


**TRATTO**: an innovative and up-to-the-minute solution.



Detail of the radiator Tratto painted in Opaque Red (cod. 7B).





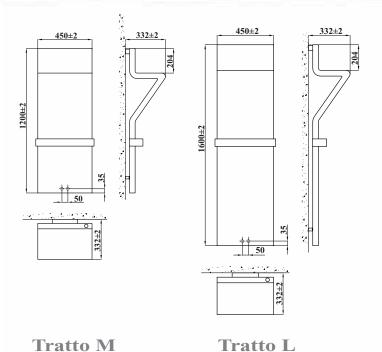

### Packing included:

### 1 Water connection system installed on the product complete with fittings for connection to

In photo: Tratto radiator. Height mm 1600, width mm 450, painted in Purple Blue (cod. 1D)

copper pipes (10, 12, 14, and 16 mm diameter) and multilayer pipes (14 x 2 thick and 16 x 2 thick);

- 1 wall fixing system;
- wall spacer;
- 1 accessory holder bar;
- 1 air vent.

#### **TECHNICAL SPECIFICATIONS:**

Radiating panel. Radiating elements round tubes with an 12 mm diameter. Manifolds with a 30x40 mm square section. 1/2" Gas right threading. Maximum working pressure 4 bar. Maximum working temperature 95°C.

The thermostatic head is available on request (as an optional)

• Tratto is also available in electric version

• Tratto is also available in electric version								Thermal Power					
MODEL	Code	<b>Depth</b> mm	Height mm	Width mm	Conn.centre mm	<b>Weight</b> Kg	Capacity It	∆ <b>t</b> 50°C Btu/h	∆t 50°C Watt	∆ <b>t</b> 40°C Watt	∆t 30°C Watt	∆ <b>t</b> 20°C Watt	<b>Expon.</b> n.
Tratto	TRTM045Bxx	326	1200	450	50	21,9	1,7	1706	500	381	268	163	1,222
	TRTL045Bxx	326	1600	450	50	28,3	1,9	2388	700	531	372	225	1,240
Tratto with led*	TRTM045Bxx	326	1200	450	50	21,9	1,7	1706	500	381	268	163	1,222
	TRTL045Bxx	326	1600	450	50	28,3	1,9	2388	700	531	372	225	1,240

- xx = colour option Tratto is only available in "Serie Special" Colours.
- The "Serie Elegance" Flamed Copper(cod. 3B) and Flamed Brass (cod. 4B) are available with a separate quotation.

Heat output are estimated and are undergoing certification. Power calculated with ∆t 50°C.

- For  $\Delta t$  different from 50°C use the formula: Q=Qn ( $\Delta t$  / 50)n.
- \* Tratto function with led option code **KITLED01**.

Tratto with dual lateral lighting that outlines the radiator profile represents an ideal combination of artistic design and colour effect. Tratto is characterised by a towel holder making it a functional product and an excellent towel warmer. The towel holder is included in the package and the end user may install it or not as desired. The towel holder can be installed at three different heights and is available with a transparent methacrylate finish that enhances the radiator finish.

